


# MSZ HR

## Kompaktná nástenná jednotka




## Jednoduchý a pekný dizajn

Oblý tvar jednotky poskytuje príjemný pohľad. Vďaka kompaktným rozmerom umožňuje inštaláciu aj v malých priestoroch.

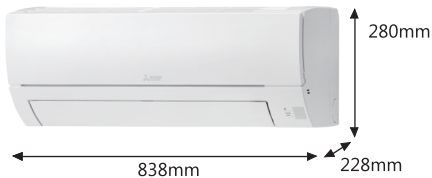

## Úspora nákladov

Vďaka inverterovej technológii dokáže jednotka plynulo riadiť otáčky kompresora v závislosti na momentálnej požiadavke výkonu. Zariadenie má tak dlhšiu životnosť a menšiu spotrebu energie. Všetky jednotky z rady MSZ-HR dosahujú energetickú triedu A++ v chladení a A+ v kúrení.

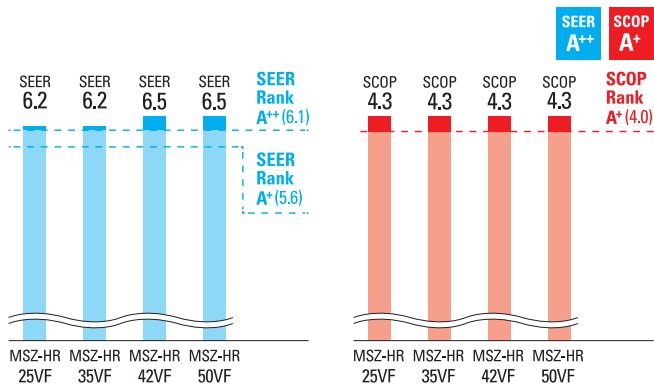

## Jednoduché ovládanie

Jednoduché a ľahké ovládanie jednotky zabezpečí užívateľovi vysoký komfort pri nastavovaní funkcií.



## Možnosť ovládania aj cez Wi-Fi

Ak je vnútorná jednotka vybavená voliteľným Wi-Fi adaptérom MAC-567IF, môžete všetky jej funkcie ovládať na diaľku cez aplikáciu prostredníctvom smartphone, PC, alebo tabletu.



## Ekologické chladivo R32

Jednotky pracujú s ekologickým chladivom R32, ktoré má malý potenciál globálneho otepľovania. Prevádzka jednotky je tak ekologickejšia.



Typ zariadenia	Výkon chladenie / kúrenie [kW]	Energetická trieda chladenie / kúrenie	Rozmery jednotky [mm]	Hlučnosť jednotky [dB(A)]	Cena jednotková [Eur]	Cena za komplet [Eur]
Vnútorná jednotka						
Vonkajšia jednotka						
<b>MSZ-HR25VF + IR ovládač</b>	2,5/3,15	A++/A+	280x838x228	21-43	221,-	688,-
<b>MUZ-HR25VF</b>			538x699x249	50	467,-	
<b>MSZ-HR35VF + IR ovládač</b>	3,4/3,6	A++/A+	280x838x228	22-46	264,-	784,-
<b>MUZ-HR35VF</b>			538x699x249	51	520,-	
<b>MSZ-HR50VF + IR ovládač</b>	5,0/5,4	A++/A+	280x838x228	28-45	350,-	996,-
<b>MUZ-HR50VF</b>			550x800x285	50	646,-	

# Air Conditioning

## Product Information

**MSZ-HR R32**  
**Classic Wall Mounted System**  
Inverter Heat Pump

Making a  
World of  
Difference

M series



Mitsubishi Electric's range of classic, flat panel wall mounted models make use of inverter technology, whilst providing extremely good value for money, costing approximately 20% less than the MSZ-AP equivalent.

### Key Features

- Compact and stylish white design, including a new 5.0kW model
- Highly energy efficient, utilising low GWP R32 refrigerant
- Optional Wi-Fi interface now available with this model, enabling control and monitoring using a smartphone, tablet or PC via the MELCloud app
- Extremely quiet sound levels whilst also delivering economical air conditioning with improved SCOP / SEER figures
- Weekly timer provides greater control of scheduling



Cooling | Heating | Ventilation | Controls

**R32**

# Air Conditioning

## Product Information

### MSZ-HR R32 Classic Wall Mounted System Inverter Heat Pump


Making a  
World of  
Difference



MSZ-HR - INDOOR UNITS		MSZ-HR25VF	MSZ-HR35VF	MSZ-HR50VF
CAPACITY (kW)	Heating (nominal)	3.15 (0.7-3.5)	3.60 (0.9-3.7)	5.40 (1.4-6.5)
	Cooling (nominal)	2.50 (0.5-2.9)	3.40 (0.9-3.4)	5.00 (1.3-5.0)
	Heating (UK)	2.61 (0.6-2.9)	2.99 (0.75-3.1)	4.48 (1.16-5.39)
	Cooling (UK)	2.48 (0.5-2.8)	3.37 (0.89-3.4)	4.96 (1.29-4.96)
SHF (nominal)		0.78	0.78	0.73
COP / EER (nominal)		3.71 / 3.13	3.69 / 2.81	3.48 / 2.44
SCOP / SEER (BS EN14825)		4.30 / 6.20	4.30 / 6.20	4.30 / 6.50
ErP ENERGY EFFICIENCY CLASS	Heating/Cooling	A+ / A++	A+ / A++	A+ / A++
AIRFLOW (l/s)	Heating/Cooling - Lo-Mi-Hi-SHi	55-90-123-168 / 60-90-120-162	55-90-123-175 / 60-93-130-195	102-138-187-242 / 107-153-187-218
PIPE SIZE mm (in)	Gas	9.52 (3/8")	9.52 (3/8")	9.52 (3/8")
	Liquid	6.35 (1/4")	6.35 (1/4")	6.35 (1/4")
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling - Lo-Mi-Hi-SHi	21-30-37-43 / 21-30-37-43	21-30-37-44 / 22-31-38-46	27-34-41-47 / 28-36-40-45
SOUND POWER LEVEL (dBA)		57	60	60
DIMENSIONS (mm)	Width x Depth x Height	838 x 228 x 280	838 x 228 x 280	838 x 228 x 280
WEIGHT (kg)		8.5	8.5	9
ELECTRICAL SUPPLY		Fed by Outdoor Unit	Fed by Outdoor Unit	Fed by Outdoor Unit
FUSE RATING (BS88) - HRC (A)		6	6	6
INTERCONNECTING CABLE No. CORES		4	4	4

MUZ-HR - OUTDOOR UNITS		MUZ-HR25VF	MUZ-HR35VF	MUZ-HR50VF
SOUND PRESSURE LEVEL (dBA)	Heating/Cooling	50 / 50	51 / 51	51 / 50
SOUND POWER LEVEL (dBA)	Cooling	63	64	64
WEIGHT (kg)		23	24	35
DIMENSIONS (mm)	Width x Depth x Height	699 x 249 x 538	699 x 249 x 538	800 x 285 x 550
ELECTRICAL SUPPLY		220-240v, 50Hz	220-240v, 50Hz	220-240v, 50Hz
PHASE		Single	Single	Single
SYSTEM POWER INPUT (kW)	Heating/Cooling (nominal)	0.85 / 0.80	0.98 / 1.21	1.55 / 2.05
	Heating/Cooling (UK)	0.77 / 0.63	0.89 / 0.96	1.40 / 1.62
STARTING CURRENT (A)		4.1	5.9	9.0
SYSTEM RUNNING CURRENT (A)	Heating/Cooling [MAX]	4.1 / 3.8 [4.8]	4.6 / 5.9 [6.4]	6.9 / 9.0 [9.6]
FUSE RATING (BS88) - HRC (A)		10	10	16
MAINS CABLE No. CORES		3	3	3
MAX PIPE LENGTH (m)		20	20	20
MAX HEIGHT DIFFERENCE (m)		12	12	12
CHARGE REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) - R32 (GWP 675)		0.40 / 0.27	0.45 / 0.30	0.80 / 0.54
MAX ADDITIONAL REFRIGERANT (kg) / CO <sub>2</sub> EQUIVALENT (t) - R32 (GWP 675)		0.26 / 0.18	0.26 / 0.18	0.26 / 0.18

#### PRODUCT DIMENSIONS

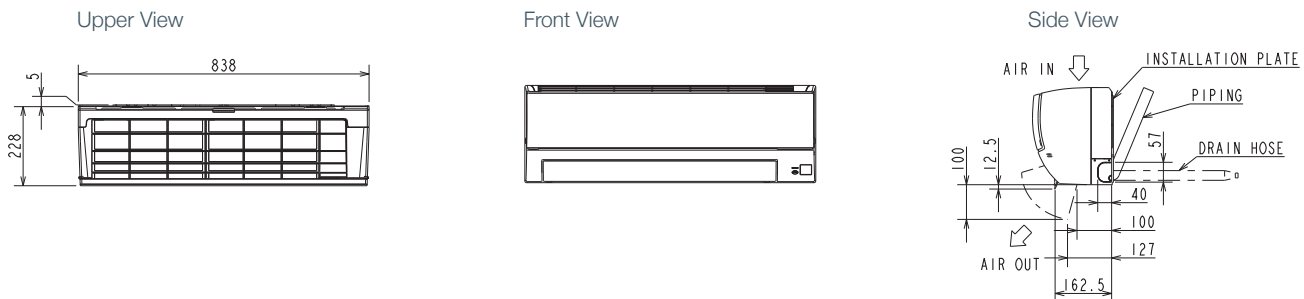

Telephone: 01707 282880  
email: [air.conditioning@meuk.mee.com](mailto:air.conditioning@meuk.mee.com)  
web: [airconditioning.mitsubishielectric.co.uk](http://airconditioning.mitsubishielectric.co.uk)

UNITED KINGDOM Mitsubishi Electric Europe Living Environment Systems Division  
Travellers Lane, Hatfield, Hertfordshire, AL10 8XB, England General Enquiries Telephone: 01707 282880 Fax: 01707 278881

IRELAND Mitsubishi Electric Europe Westgate Business Park, Ballymount, Dublin 24, Ireland  
Telephone: Dublin (01) 419 8800 Fax: Dublin (01) 419 8890 International code: (003531)

Country of origin: United Kingdom - Japan - Thailand - Malaysia. ©Mitsubishi Electric Europe 2018. Mitsubishi and Mitsubishi Electric are trademarks of Mitsubishi Electric Europe B.V. The company reserves the right to make any variation in technical specification to the equipment described, or to withdraw or replace products without prior notification or public announcement. Mitsubishi Electric is constantly developing and improving its products. All descriptions, illustrations, drawings and specifications in this publication present only general particulars and shall not form part of any contract. All goods are supplied subject to the Company's General Conditions of Sale, a copy of which is available on request. Third-party product and brand names may be trademarks or registered trademarks of their respective owners.

Note: The fuse rating is for guidance only. Please refer to the relevant databook for detailed specification. It is the responsibility of a qualified electrician/electrical engineer to select the correct cable size and fuse rating based on current regulation and site specific conditions. Mitsubishi Electric's air conditioning equipment and heat pump systems contain a fluorinated greenhouse gas, R410A (GWP:2088), R32 (GWP:675), R407C (GWP:1774) or R134a (GWP:1430). \*These GWP values are based on Regulation (EU) No 517/2014 from IPCC 4th edition. In case of Regulation (EU) No.626/2011 from IPCC 3rd edition, these are as follows: R410A (GWP:1975), R32 (GWP: 550), R407C (GWP:1650) or R134a (GWP:1300).



[www.greengateway.mitsubishielectric.co.uk](http://www.greengateway.mitsubishielectric.co.uk)  
Mitsubishi Electric UK's commitment to the environment

Follow us @meuk\_Jes  
Follow us @green\_gateway

Mitsubishi Electric  
Living Environmental Systems UK

[mitsubishielectric2](https://www.youtube.com/channel/UCm5b1v1v1v1v1v1v1v1v1v1)

[thehub.mitsubishielectric.co.uk](http://thehub.mitsubishielectric.co.uk)

Effective as of December 2018